


Breakout Cable Assemblies

ORDERING INFORMATION

Breakout Cable Assemblies

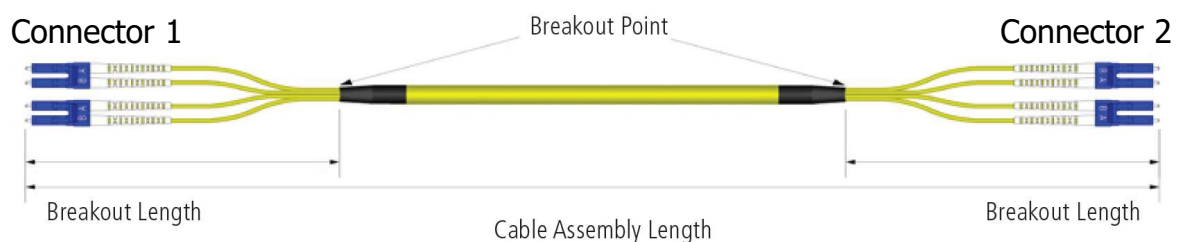

Please contact us with your requirements directly.

Below is a guide to help you specify Breakout Cable Assemblies:

Specification	Options						
Connector 1 & 2	SC	DSC	LC	DLC	ST	FC	MPO
Polish Type	UPC				APC		
Other Connector Properties	Any other requirements not listed, for example: - Different polish / loss requirements - MPO: Male / Female						
Lengths	In metres (m): - Cable Assembly Length - Breakout Length 1 / Breakout length 2						
Oversleeving	For the breakouts on each side, fibers may be additionally protected between the breakout points to the connectors on each side - None - PVC Tubing 2 / 3 mm Colour Tubing						
Fibre grade	SM	OM1	OM2	OM3	OM4		
Cable Fibre Count	4F	6F	8F	12F	24F		
Cable type	- Riser - Round Mini 3 mm - Etc						
Cable grade	Plenum (Standard)	PVC	Riser	Low Smoke Zero Halogen (LSZH)			
Polarity	Straight-through		Crossover		Pair Flipping		
Other	Any other requirements not listed, for example: - Cables with other fibre counts (example > 24F), grades or jacket colours - Specific optical fibres and grades - Cable Drum (for > 40 m assemblies)						

Please refer to Fibre Optic Cable Assemblies & MPO Cable Assemblies for specifications of the various connectors

Fujikura Asia Limited